


Product Bulletin

Subject: Add optional Lock and Selector Valve Kit to existing Trailer Jack / Hoist installation

⚠ WARNING To safely install lock and selector valves, all hydraulic pressure must be released from the system. The trailer must be supported so all weight is removed from the trailer jack and the cylinder must be in the full down position.

Single Trailer Jack and Hoist Cylinder

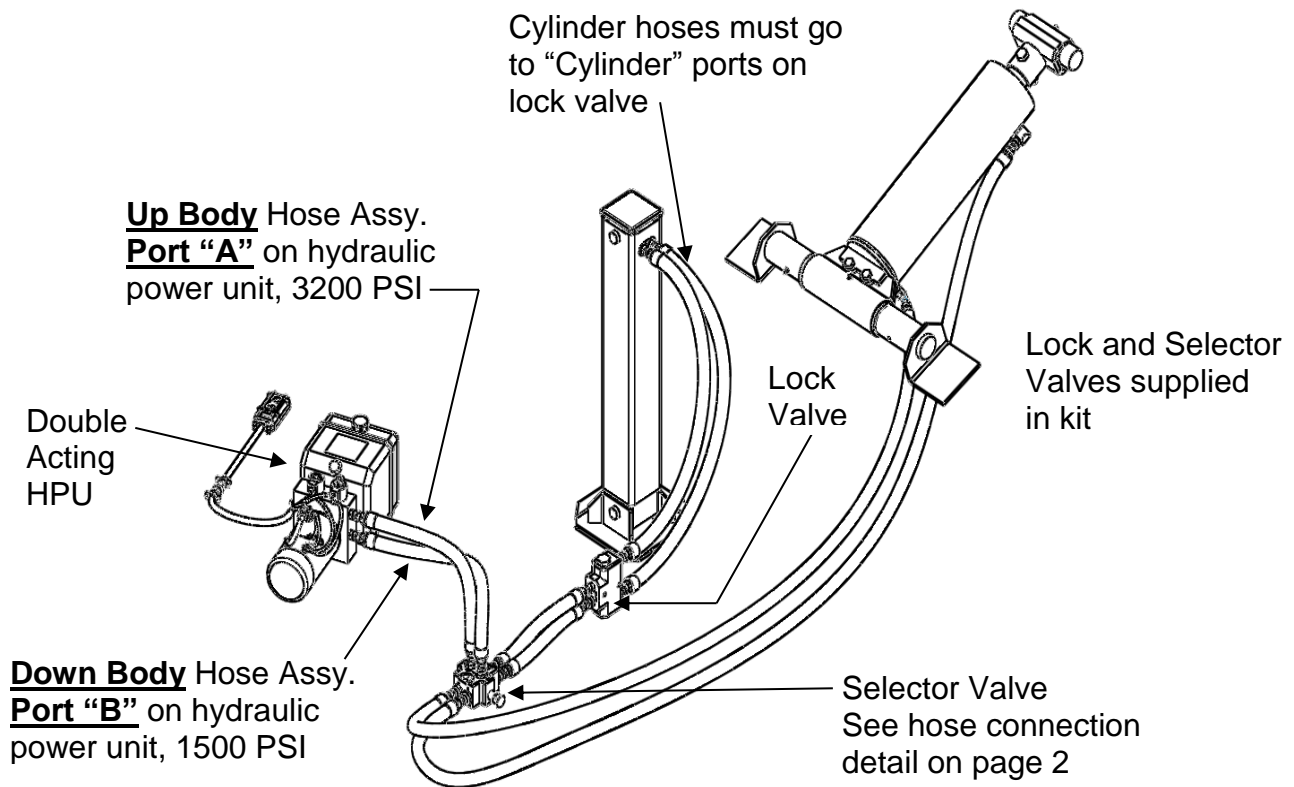

**Dual Trailer Jacks and
Hoist Cylinder**

